

DM 8320

Mini Goose Neck Microphone for Hands-Free Installations

DESCRIPTION

- Ensures optimum signal to noise ratio.
- Quick and simple mounting and connection.
- Can be bent over and over again without weakening of the ability of keeping position.
- High-sensitivity built-in electret cartridge with amplifier.
- Voltage supply 9–15 VDC when connected as shown in the diagram below.
- Supplied with 4 m cable.



Also available in grey colour





ORDERING DESIGNATIONS

TYPE NO.	PRODUCT NO.
DM 8320	270000036

SPECIFICATIONS

ELECTRICAL	
MODEL	DM 8320
TYPE	Goose neck microphone
POLAR PATTERN	Non-directional
IMPEDANCE	1 k Ω
FREQ. RESPONSE	Shown in diagram below
SENSITIVITY	-46 dB \pm 3 dB at 1 kHz rel. 1 V/Pa
CARTRIDGE TYPE	Electret
VOLTAGE SUPPLY	Nominal: 2 V. (Max. 10 V)
CURRENT CONSUMPTION	Approx. 0.5 mA
MECHANICAL	
CABLE	4 m 1-wire with shield
TEMP. RANGE	Operating : -25 $^{\circ}$ C to + 55 $^{\circ}$ C Storage : -40 $^{\circ}$ C to + 55 $^{\circ}$ C
MATERIALS	Aluminium and ABS
DIMENSIONS	Approx. 180 mm
WEIGHT	Approx. 75 g

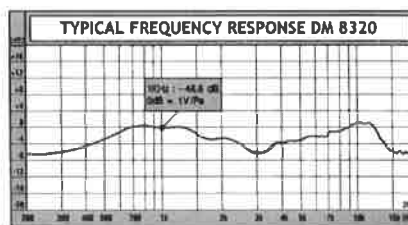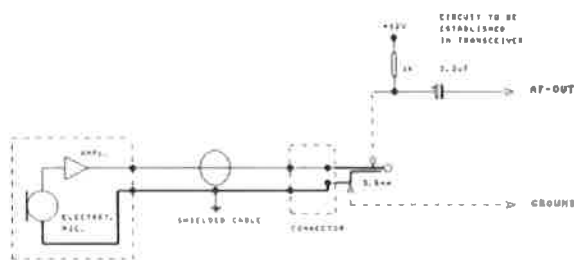

PROCOM A/S reserve the right to amend specifications without prior notice.

24/11/11